




DD-02

VIDEO INTERCOM

- + Flush-mounted installation, surface-mounted box option
- + Hearing loop
- + Plate on swivel hinge
- + Pinhole camera
- + Trade button
- + 12 keys backlit coded keypad

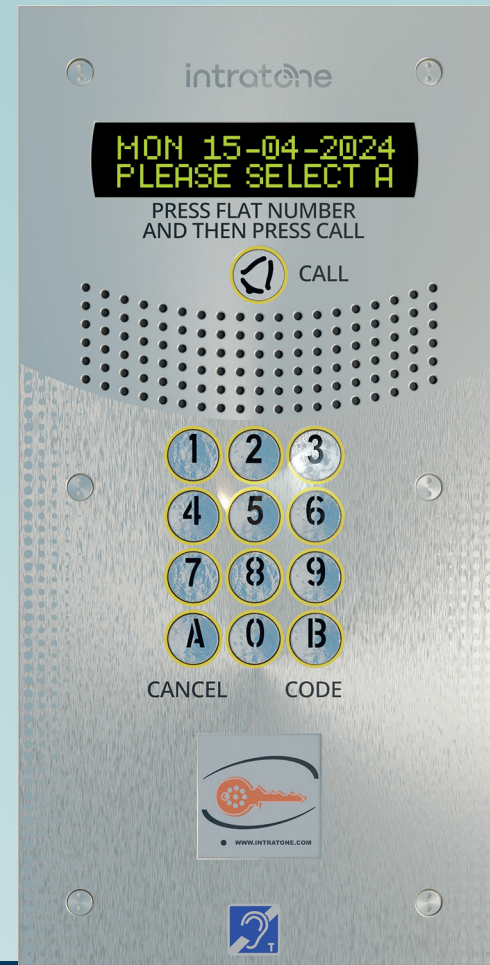

DD-02 stainless steel finish 02-0206



INSTALLATION MANUAL



DD-02 VIDEO INTERCOM RANGE

		1 INTERCOM	1 INTERCOM + 1-DOOR CENTRAL UNIT // 200 NAMES	1 INTERCOM + 2-DOORS CENTRAL UNIT // 1,000 NAMES
DD-02	Stainless steel finish	02-0206	02-0207	02-0208

ACCESSORIES



DD-02 Surface-mounted box

Stainless steel finish	12-0160	W 155.5 x H 305.5 x D 67
------------------------	---------	--------------------------

INTERCOM

DIMENSIONS (W x H x D)	DD-02 intercom	150 x 300 x 2.5 mm
	DD-02 Flush-mounted tank	126.4 x 274 x 45 mm
ENVIRONMENT	Operating temperature	-20°C to +60°C
	Index Protection	IP54 / IK08
ACCESS CONTROL EQUIPMENT	Coded keypad	✓
	Square proximity reader	✓
	Outdoor / Indoor	✓
INSTALLATION	Flush-mounted	✓
	Surface-mounted	Surface-mounted box available as an add-on product
ADDITIONAL INFORMATION	Accessibility Needs compliant	✓
	Hearing loop	✓
	Braille keypad	✓
	Yellow highlighted buttons	✓
	Time taken to connect	40 sec.
	Configurable welcome message (64 scrolling or static characters)	✓
	Name or flat number displayed on time slots	✓
	Display: 2 lines of 16 characters each	✓
	Functional messages: (call in progress, etc.) Voice synthesis + display	✓
	Anti-disturbance (I)	✓
	Sound level adjustment without dismantling (depending on the associated central unit)	✓
	Automatic call return if no answer	✓

(I) System to prevent residents being disturbed by repeated calls

CENTRAL UNITS

	 1 door - 03-0102	 2 doors - 03-0101
CENTRAL UNIT CHARACTERISTICS		
Maximum number of dwellings managed	200	1,000
Power supply recommended (not included)	12 VDC 5A - 24 VDC 2,5A	
SYSTEM		
Number of relays	1 (+3)	2 (+2)

SERVICE PACKAGE CHOICE

Once you've selected your equipment, take out the package of your choice to ensure the intercom's functionality.

DON'T FORGET TO ADD YOUR SERVICE PACKAGE !


CLASSIC
SERVICE PACKAGE

PREPAID
15 YEARS
ALL INCLUSIVE PACKAGE

See pages XX and XX TO DISCOVER THE OFFERS

4G-IP MODULE CHARACTERISTICS	4G-IP module	Deported
	Number of intercom(s) per 4G-IP module (video)	1 to 3 (depending on the type of central unit)

SIMPLIFIED SCHEME* and WIRING

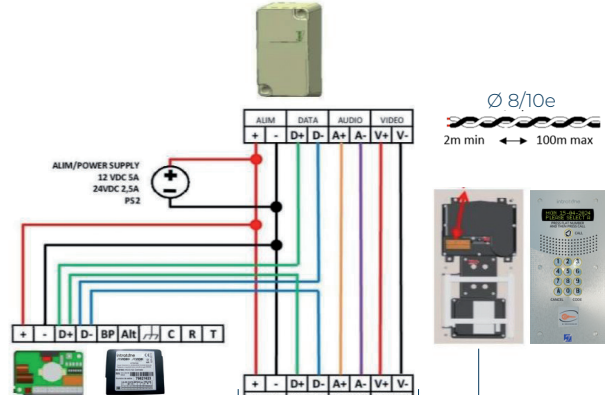

Ref: 03-0102

	1 door - 03-0102	2 doors - 03-0101
4G-IP module Central unit	4 wires (2 twisted pairs)	6 wires (3 twisted pairs)
Central unit Intercom	4 wires (2 twisted pairs)	6 wires (3 twisted pairs)
Intercom 4G-IP module	4 wires (2 twisted pairs)	2 wires (1 twisted pair)

*1-door central unit scheme.
To view the 2-doors central unit scheme, you can scan the installation manual QR code

➔ MORE INFORMATION ON CENTRAL UNITS ? See pages XX and XX

SCROLLING INTERCOM